
frost DRAINAGE

Product Specification



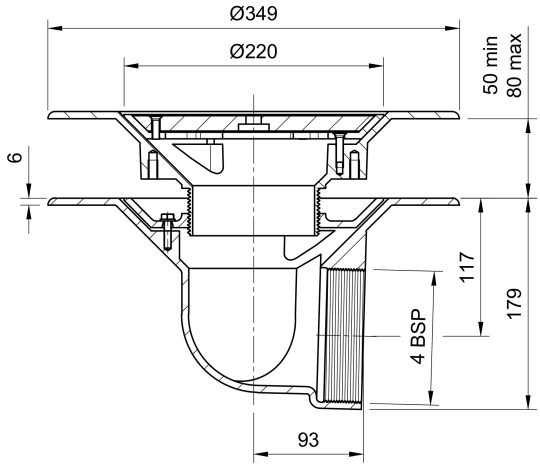

Name
Frost Warm Roof drain assembly - cast iron grating, fixed 240mm circular, medium sump body with clamp, horizontal threaded outlet 4" BSP

Code
33.0114

Description
Frost Warm Roof drain assembly - cast iron grating, fixed 240mm circular, medium sump body with clamp, horizontal threaded outlet 4" BSP.
Rain water outlets with flat gratings suited to warm roof construction where the waterproof membrane is located above the insulation layer on top of the roof deck.

Cast Iron Grade EN-GJL-150 to BS EN 1561:1997
90%-97% recycled materials
100% recyclable

Ductile Iron BS EN 1563 & 1564
Greater than 80% recycled material
100% recyclable

Body Material
CAST IRON

Body Type
N/A

Grating Material
DUCTILE IRON

Flow Rate
7.88 l/s

Outlet Type
THREADED

Grating Type
FLAT

Load Rating
L15

Threaded Joint Instructions

Apply Low Modulus Silicone to the thread of the pipe spigot & female thread within the roof outlet body. Using a flat spreading utensil, evenly spread the silicone into the threaded grooves. Insert the male into the female thread of the roof outlet body then carefully turn clockwise ensuring the thread is not "cross threading". Once fully tightened clean off excess silicone to both ends of the threaded connection.