
Product Specification



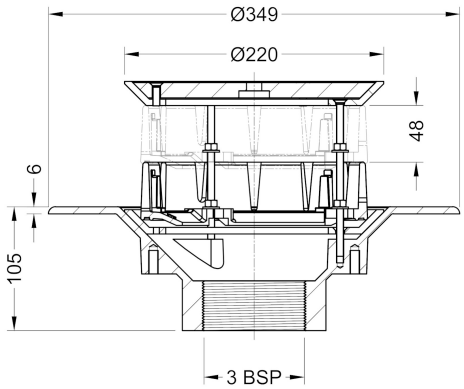

Name
Frost Aluminium Inverted Roof drain assembly - aluminium grating, fixed 240mm circular, medium sump body with clamp, vertical threaded outlet 3" BSP

Code
34.0353

Description
Frost Inverted Roof drain assembly, aluminium grating, fixed 240mm circular, medium sump body with clamp, vertical threaded outlet 3" BSP
Supplied with grating and clamp.
Rainwater outlets with flat gratings are suited to inverted roof construction where the waterproof membrane is located above the roof deck but below the insulation layer.

Aluminium LM 6 to BS EN 1599-4:2015

Threaded reducers to 2" available

Body Material
ALUMINIUM

Body Type
N/A

Grating Material
ALUMINIUM

Flow Rate
5 l/s

Outlet Type
THREADED

Grating Type
FLAT

Load Rating
L15

Fire Rating
A1

Threaded Joint Instructions

Apply low modulus silicone to the spigot and roof outlet threads, spreading it evenly into the grooves. Screw the male thread clockwise into the outlet, ensuring it does not cross-thread, and wipe away excess silicone once fully tightened.