
frost DRAINAGE

# Product Specification



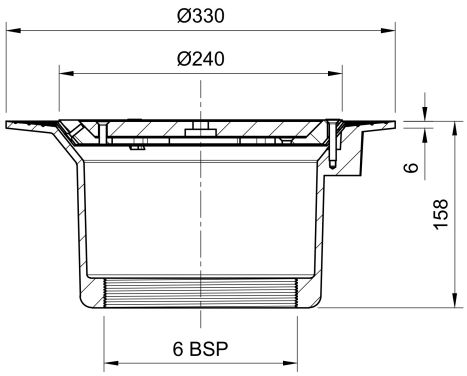


## Name
Frost Floor drain assembly medium duty th clamp fixed grating 240mm round, large sum body  cast iron vertical outlet BSP6

## Code
31.0146

## Description
Frost floor drain with 240mm circular flat grating, large sump body and threaded outlet size BSP 6
Supplied with membrane clamp.
Connect to pipework using an adaptor.
Untrapped medium duty assemblies for use in floors with an asphalt or composition surface membrane and subject to light vehicular traffic.

Cast iron Grade EN-GJL-150 to BS EN 1561:1997
80%-97% recycled materials
100% recycable

Ductile iron BS EN 1563 & 1564
Greater than 80% recycled materials
100% recyclable

## Body Material
CAST IRON

## Body Type
UNTRAPPED

## Grating Material
DUCTILE IRON

## Flow Rate
N/A

## Outlet Type
THREADED

## Load Rating
L15 To BS EN 1253-1:2015

## Threaded Joint Instructions

Apply Low Modulus Silicone to the thread of the pipe spigot & female thread within the roof outlet body. Using a flat spreading utensil, evenly spread the silicone into the threaded grooves. Insert the male into the female thread of the roof outlet body then carefully turn clockwise ensuring the thread is not "cross threading". Once fully tightened clean off excess silicone to both ends of the threaded connection.