
frost DRAINAGE

# Product Specification



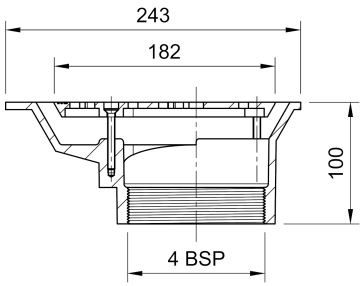


## Name
Frost Aluminium Balcony outlet, aluminium grating and clamping ring, small sump body, vertical threaded outlet 4" BSP

## Code
34.0434

## Description
Frost Balcony outlet with aluminium grating and small sump body and threaded outlet size 4" BSP.
Balcony outlets are supplied complete with membrane clamp, allowing the grating to be removed for maintenance purposes without disturbing the membrane.
For use on balconies with an asphalt finish, the grating is designed to allow a rainwater downpipe from the balcony above to be fitted into the body, eliminating spillage onto the walkway.

Aluminium LM 6 to BS EN 1599-4:1999

## Body Material
ALUMINIUM

## Body Type
N/A

## Grating Material
ALUMINIUM

## Flow Rate
10.70 l/s

## Outlet Type
THREADED

## Grating Type
FLAT

## Load Rating
N/A

## Threaded Joint Instructions

Apply Low Modulus Silicone to the thread of the pipe spigot & female thread within the roof outlet body. Using a flat spreading utensil, evenly spread the silicone into the threaded grooves. Insert the male into the female thread of the roof outlet body then carefully turn clockwise ensuring the thread is not "cross threading". Once fully tightened clean off excess silicone to both ends of the threaded connection.